




Motorola Razr V3c Screen (CDMA) Replacement

Written By: Joshua Ruehlig

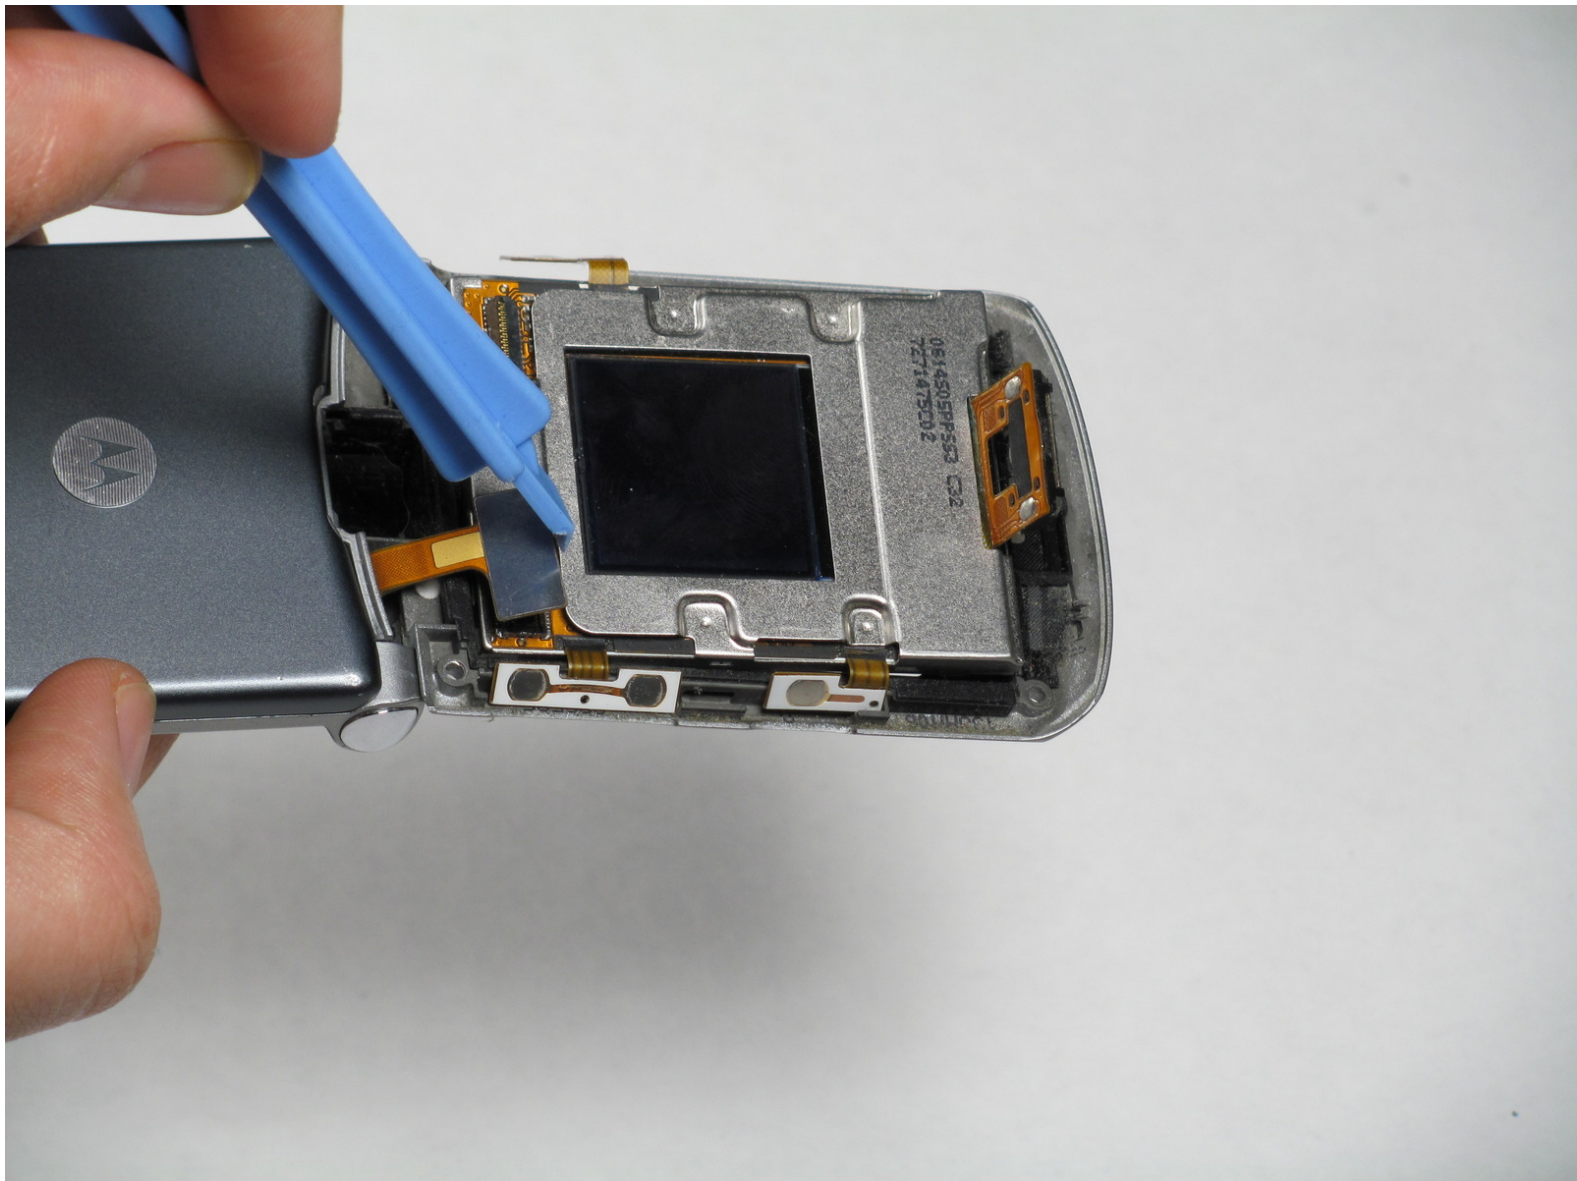

INTRODUCTION

This guide will show you how to remove and replace the screen for a Motorola V3c.

TOOLS:

- [Spudger](#) (1)
 - [T5 Torx Screwdriver](#) (1)
-

Step 1 — Upper Casing (CDMA)



- Remove the four rubber-like pieces from all corners of the surrounding area that border the screen.

Step 2




- Using a T4 screwdriver, carefully unscrew all four screws on the outer screen. Be sure that you do not strip or damage the screws.



Step 3



- Carefully pry the screen open using a plastic spudger.

 Pry slowly, as too much bending will crack the screen. There are also two fragile ribbon cables that connect the screen and camera to the phone.



Step 4

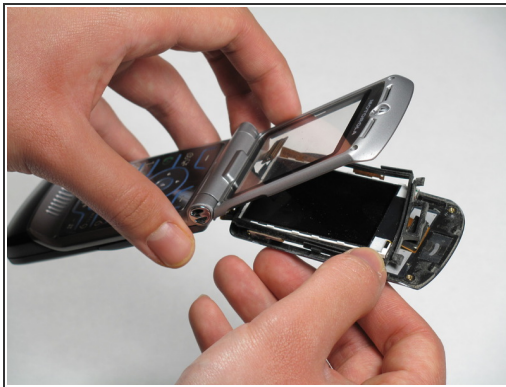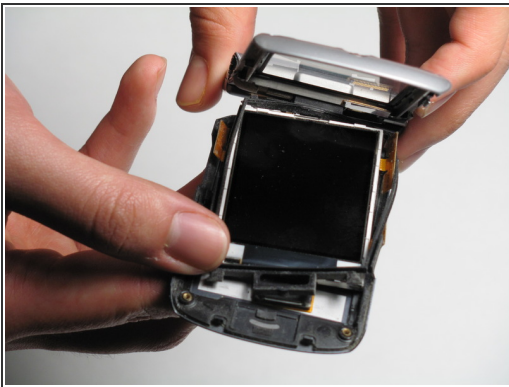

- Take the screen housing off from the casing.

 Watch for small pieces falling out from the screen during this step. Keep track of these pieces.


Step 5 — Camera (CDMA)

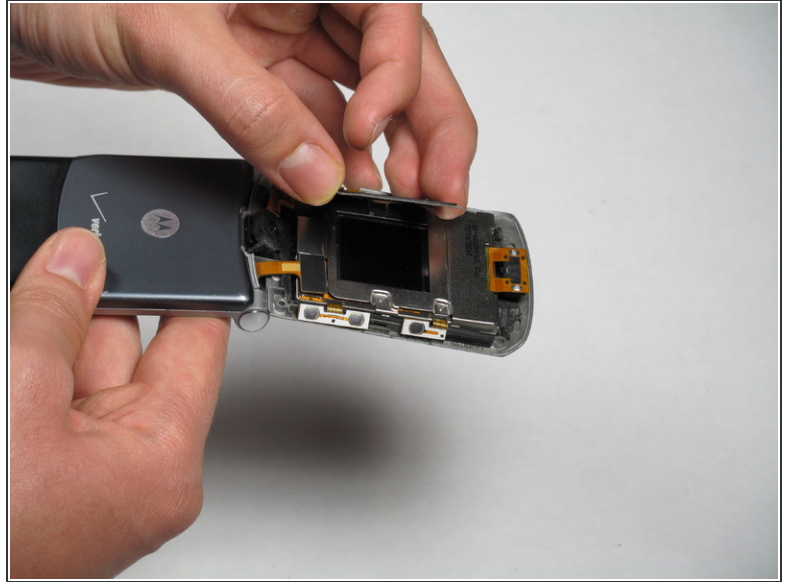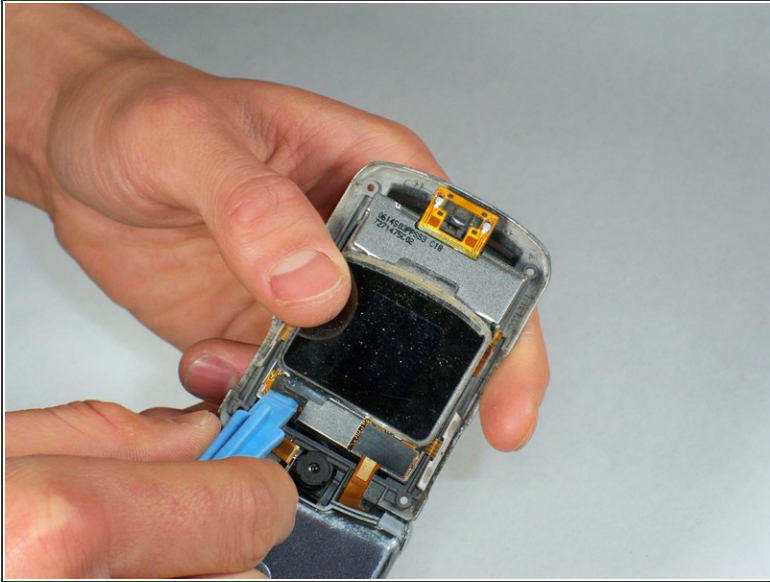

- Pry screen cover off with plastic spudger


i The screen cover has some adhesive holding it to the screen

Step 6

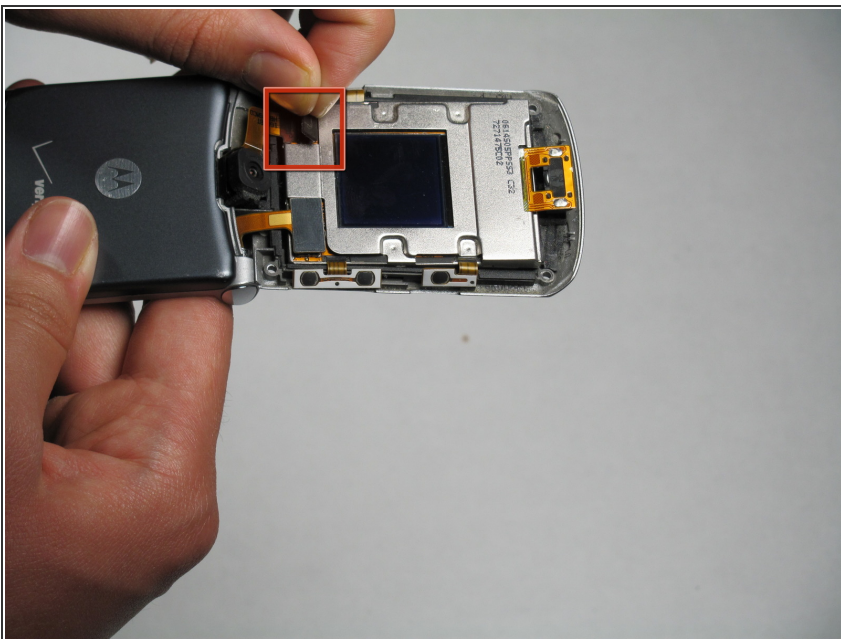


- Remove small black sticker covering the camera ribbon connector

Step 7

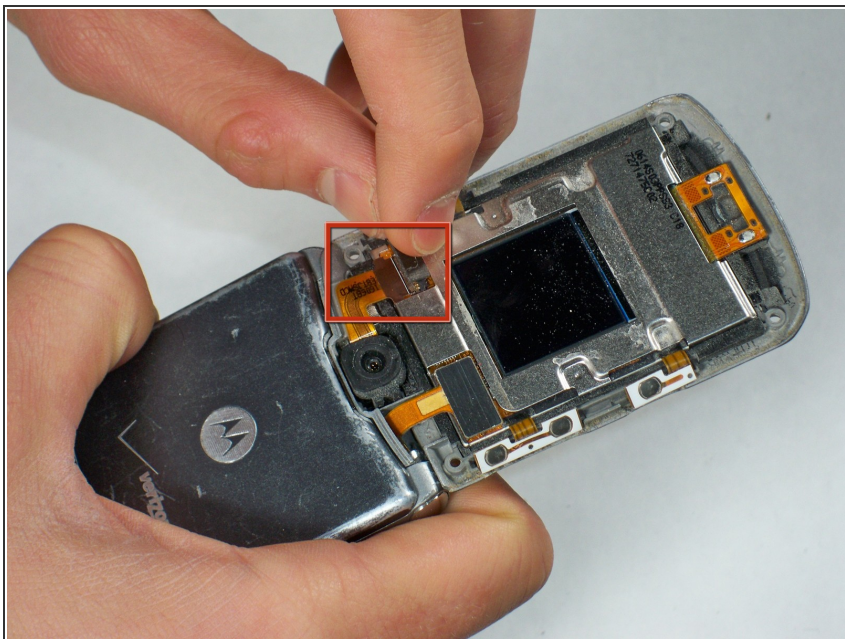


- Flip over small hinge that cover the camera ribbon connection


Step 8

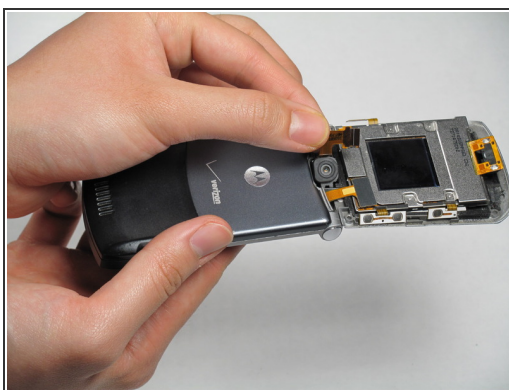

- Pull off the rubber camera cover and camera


 The camera and camera cover may come off separately or together

Step 9 — Screen (CDMA)

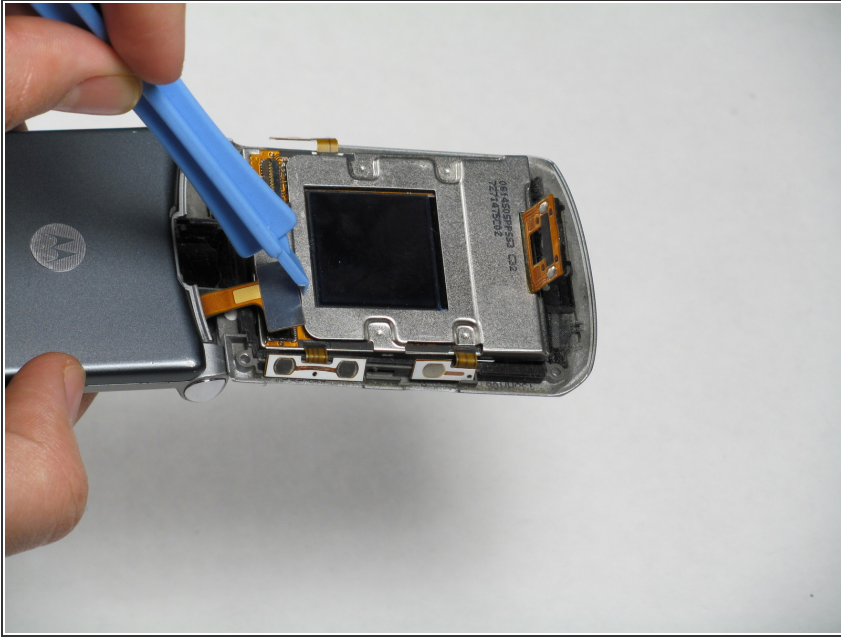

- Disconnect the metallic ribbon cover

Step 10

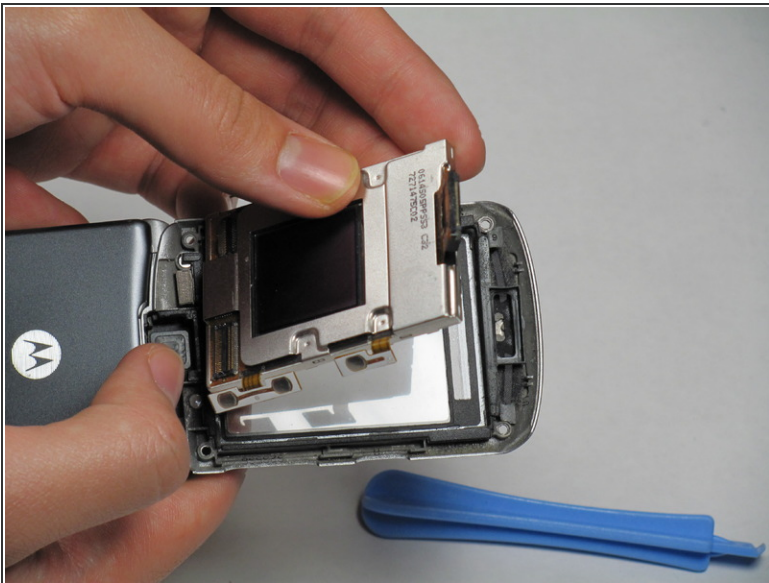

- Remove and replace the screen

This document was last generated on 2017-09-30 08:15:24 PM.